

Contents

A series
Part List

A series
Selection guide
Dimension

A series
Torque table

R series
Part list

R series
Selection guide
Dimension

R series
Torque table

Various option

Valve position
indicator

Product
List

Valve position indicator



[KLS20]

KLS20 height 104.6mm



[KLS10]

KLS10 height 87.1mm




· 3way indicator



· 4 piece plastic indicator




· The top two-fold
weatherproof structure



· Quick-set &
Both side contact cam
· Subdivided serrature
(Resolution 2.25°)


► Model code

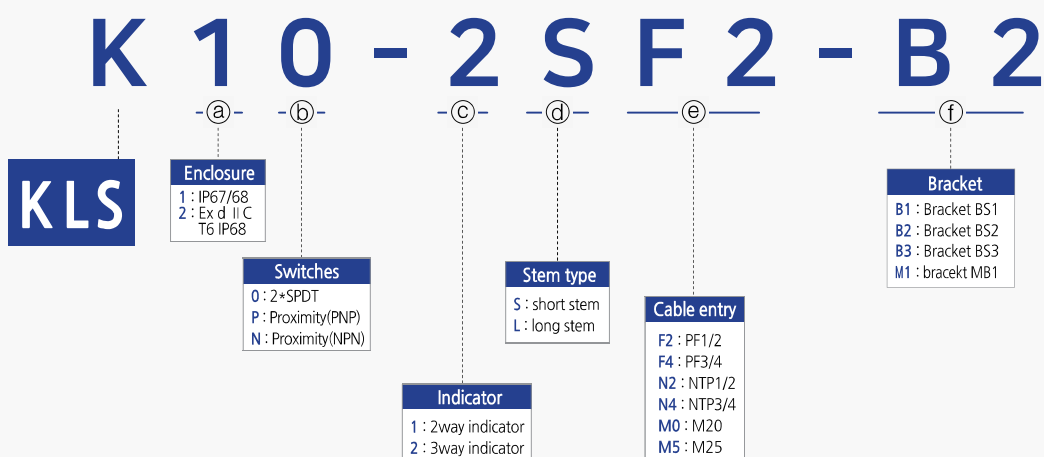


► Switch specification

KLSx0	2*SPDT	(125/250) Vac, 16Aac or 125Vdc, 0.6Adc or 250Vdc, 0.3Adc
KLSx1	2*Proximity	DC 12-24V




► Wiring

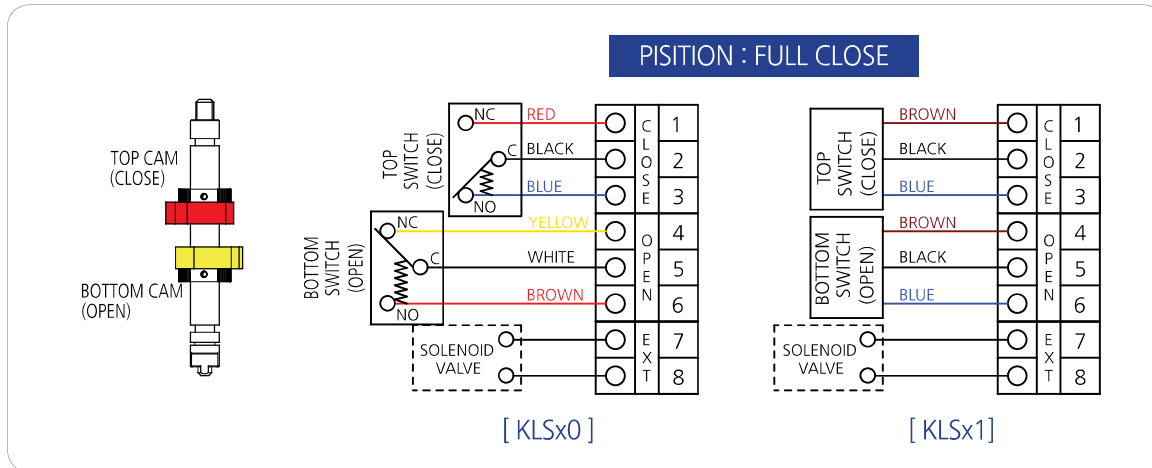

► Dimension

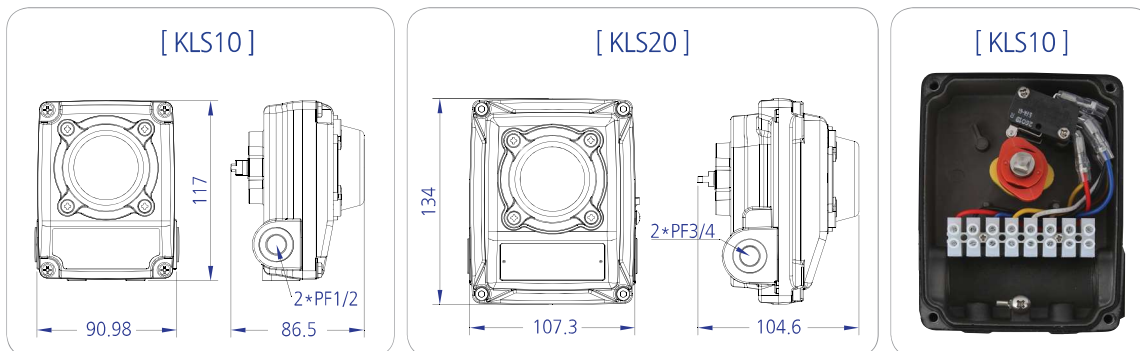

► Bracket

BS1	BS2	BS3	MB1
			
Size 50*25*20 (R40)	Size 30*80*20 (AR50~AR185)	Size 30*130*30 (AR210~A300)	Size 30*80(130)*20(30)
Material Stainless steel	Material Stainless steel	Material Stainless steel	Material Stainless steel

When using MB1, Long Stem is recommended due to interference from bolts.

Contents

A series
Part List

A series
Selection guide
Dimension

A series
Torque table

R series
Part list

R series
Selection guide
Dimension

R series
Torque table

Various option

Valve position
indicator

Product
List